


The minimum distance from the rims of adjacent holes must be 3/8" or 2 X glass thickness, whichever is greater. Reference the example below.

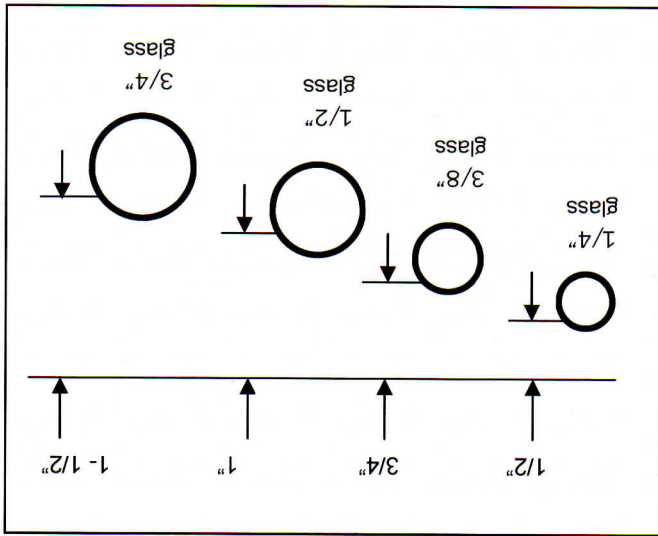

The minimum distance from the rim of a hole to the nearest edge must be 1/4" or 2 X glass thickness, whichever is greater. Reference the example below.

FABRICATION GUIDELINES

HOLE PLACEMENT